

# SDL DALI Dimmer 1 Channel (SDL/DALI/1)




The SDL DALI 1 channel is a constant voltage LED dimmer. The SDL DALI dimmer allows stepless brightness control via a DALI signal. LED dimmer drivers can be installed to meet the light needs of commercial or home lighting to reduce energy costs and to extend LED life span.



## SPECIFICATION

<b>Part No.</b>	SDL/DALI/1
<b>Supply Voltage</b>	12/24Vdc
<b>Output</b>	1 Channel
<b>Output Current (per channel)</b>	5 Amp
<b>Output Wattage</b>	60W/12Vdc, 120W/24Vdc
<b>Dimming Control DALI Definition</b>	IEC62386 / IEC60929
<b>Size (LxWxH)</b>	167mm x 40mm x 30mm
<b>Drive Capability</b>	3528/60 12 Max*
<i>With suitable power supply</i>	5050/60 4 Max*
	* Additional lengths can be driven using the SDL-RP306

## DIMENSIONS

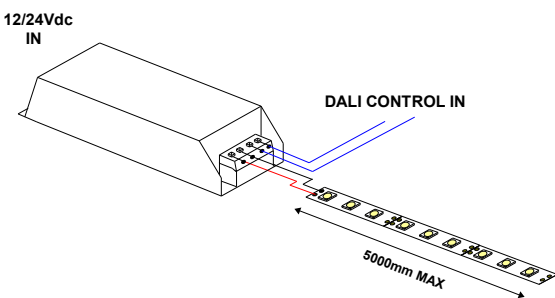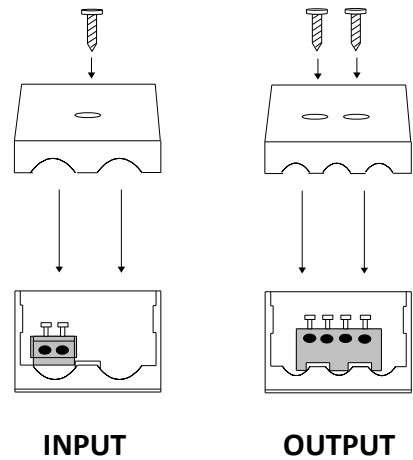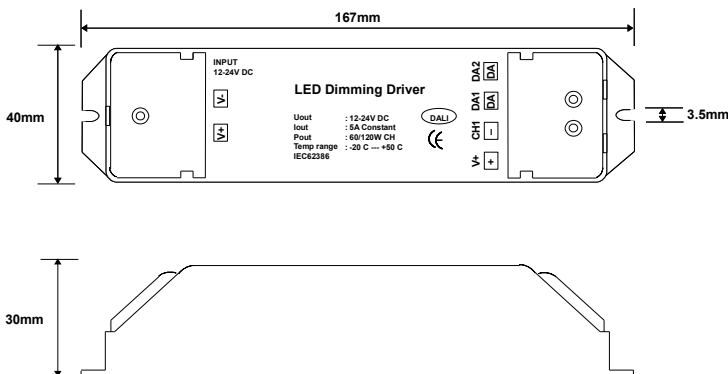

Multiple runs of up to 5000mm can be added.

**DO NOT EXCEED DRIVER LIMIT**

SDL-RP306 Data Repeater can be used to drive further lengths and keep the LEDs in sync. Please see the SDL-RP306 technical data sheet.