


SDL DALI Dimmer 3 Channel (SDL/DALI/3)

The SDL DALI 3 channel is a constant voltage LED dimmer. The SDL DALI dimmer allows stepless brightness control via a DALI signal. LED dimmer drivers can be installed to meet the light needs of commercial or home lighting to reduce energy costs and to extend LED life span.

SPECIFICATION

Part No.	SDL/DALI/3
Supply Voltage	12/24Vdc
Output	3 Channel
Output Current (per channel)	6 Amp
Output Wattage (per channel)	72W/12Vdc, 144W/24Vdc
Dimming Control DALI Definition	IEC62386 / IEC60929
Size (LxWxH)	153mm x 67mm x 30mm
Drive Capability (per channel)	3528/60 14 Max*
<i>With suitable power supply</i>	5050/60 5 Max*
	* Additional lengths can be driven using the SDL-RP306

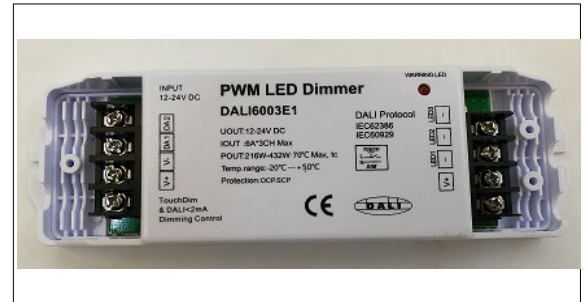

DIMENSIONS

