


Our standard brightness is a versatile flexible LED strip. The surface mount Epistar LED's are on a 8mm wide flexible white PCB with 3M adhesive tape on the rear to allow quick and easy installation. This product can be used with our range of dimmers, DMX drivers and power supply units.



### SPECIFICATION

<b>Part No.</b>	3528/60/
<b>Voltage</b>	12Vdc
<b>Power Consumption</b>	4.8W / 400mA per metre
<b>LED Qty</b>	60 per metre
<b>LED Type</b>	Epistar 3528
<b>Size (WxH)</b>	8mm x 2.5mm
<b>Cutting Interval</b>	50mm
<b>Colours Available</b>	Pure White, Warm White, Green, Red & Blue

### DIMENSIONS

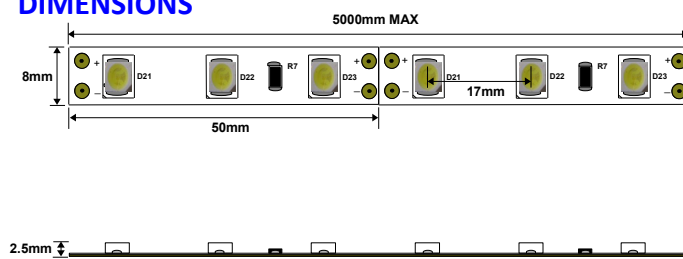

### LUMEN OUTPUT

<b>Pure White</b>	450
<b>Warm White</b>	420
<b>Green</b>	290
<b>Red</b>	130
<b>Blue</b>	115


Data based on 1000mm

### CAN BE CUT EVERY 50MM (every 3 LEDs)




### THE RIGHT POWER SUPPLY UNIT?

<b>SDL36</b>	Up to 6m
<b>SDL72</b>	Up to 13m
<b>SDL120</b>	Up to 23m
<b>SDL150</b>	Up to 29m
<b>SDL200</b>	Up to 39m
<b>SDL350</b>	Up to 70m

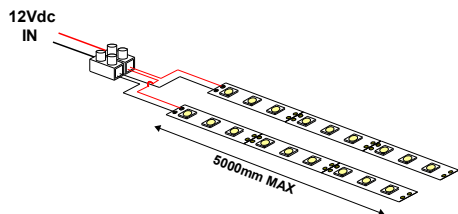

Multiple runs of up to 5000mm can be added.  
DO NOT EXCEED PSU LIMIT

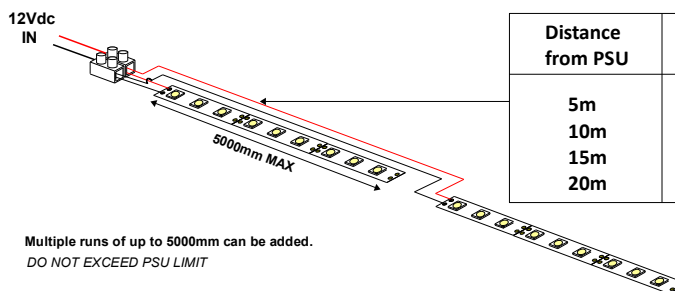

Multiple runs of up to 5000mm can be added.  
DO NOT EXCEED PSU LIMIT