


Our standard brightness weatherproof is a versatile flexible LED strip. The surface mount Epistar LED's are on a 8mm wide flexible white PCB within a 10mm wide clear silicone sleeve. Backed with 3M adhesive tape on the rear to allow quick and easy installation. This product can be used with our range of dimmers, DMX drivers and power supply units.



SPECIFICATION

Part No.	3528/60/IP/
Voltage	12Vdc
Power Consumption	4.8W / 400mA per metre
LED Qty	60 per metre
LED Type	Epistar 3528
Size (WxH)	10mm x 4.5mm
Cutting Interval	50mm
Colours Available	Pure White, Warm White, Green, Red & Blue

DIMENSIONS

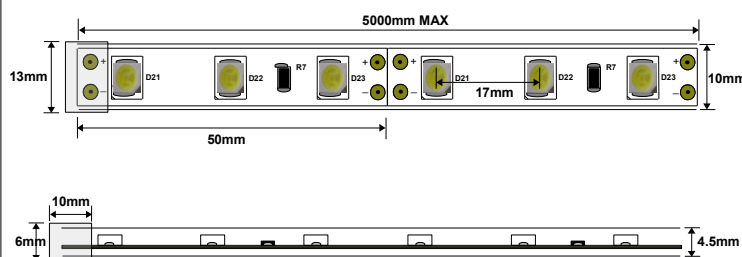

LUMEN OUTPUT

Pure White	450
Warm White	420
Green	290
Red	130
Blue	115


Data based on 1000mm

CAN BE CUT EVERY 50MM (every 3 LEDs)




THE RIGHT POWER SUPPLY UNIT?

SDL36	Up to 6m
SDL72	Up to 13m
SDL120	Up to 23m
SDL150	Up to 29m
SDL200	Up to 39m
SDL350	Up to 70m

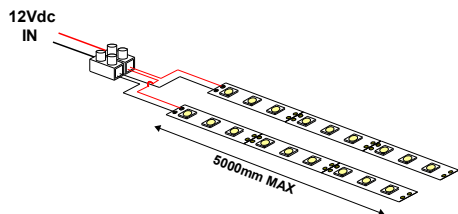

Multiple runs of up to 5000mm can be added.
DO NOT EXCEED PSU LIMIT

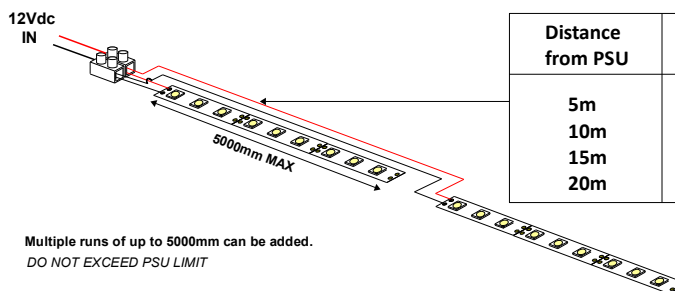

Multiple runs of up to 5000mm can be added.
DO NOT EXCEED PSU LIMIT