

Weatherproof Standard Brightness (3528/60/IP/)


Our standard brightness weatherproof is a versatile flexible LED strip. The surface mount Epistar LED's are on a 8mm wide flexible white PCB within a 10mm wide clear silicone sleeve. Backed with 3M adhesive tape on the rear to allow quick and easy installation. This product can be used with our range of dimmers, DMX drivers and power supply units.




SPECIFICATION

Part No.
Voltage
Power Consumption
LED Qty
LED Type
Size (WxH)
Cutting Interval
Colours Available

3528/60/IP/ 12Vdc 4.8W / 400mA per metre 60 per metre Epistar 3528 10mm x 4.5mm 50mm Pure White, Warm White, Green, Red & Blue

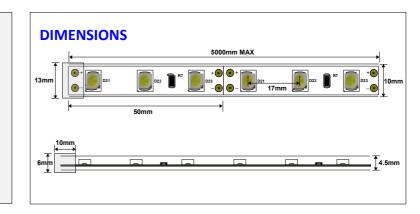

LUMEN OUTPUT		CAN BE CUT EVERY 50MM (every 3 LEDs)	THE RIGHT POWER SUPPLY UNIT?	
Pure White	450		SDL36	Up to 6m
Warm White	420		SDL72	Up to 13m
Green	290		SDL120	Up to 23m
Red	130		SDL150	Up to 29m
Blue	115	and the second second	SDL200	Up to 39m
Data based on 1000mm			SDL350	Up to 70m

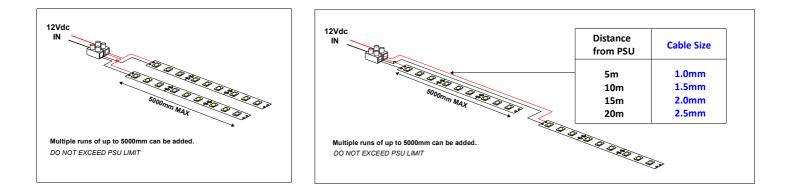

SDL Lighting, 107-109 Mowbray Drive, Blackpool, FY3 7UN (T) 0844 335 2330, (T) 07389 009 006, www.sdllighting.co.uk, contact@sdllighting.co.uk SDL Lighting is part of the Eko Forest Group Limited