

Colour Change Weatherproof Standard Brightness (5050/30/IP/RGB)


Our colour change standard brightness weatherproof is a versatile flexible LED strip. The surface mount Epistar LED's are on a 10mm wide flexible white PCB within a 12mm wide silicone sleeve. Backed with 3M adhesive tape on the rear to allow quick and easy installation. This product can be used with our range of RGB controllers, DMX drivers and power supply units.



SPECIFICATION

Part No.	5050/30/IP/RGB
Voltage	12Vdc
Power Consumption	7.2W / 600mA per metre
LED Qty	30 per metre
LED Type	Epistar Tri 5050
Size (WxH)	12mm x 4.5mm
Cutting Interval	100mm


DIMENSIONS

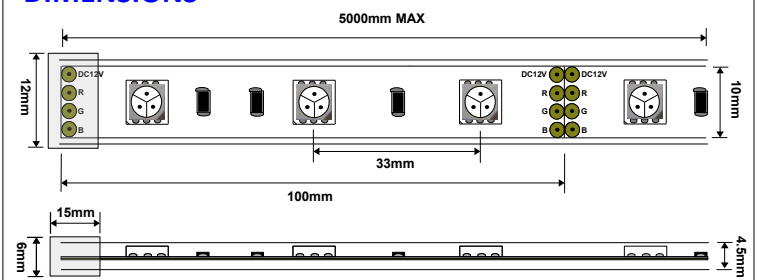

Controller/Driver Capabilities

ColourPAD 24 (SDL-CP-24)	10m
ColourPAD 44 (SDL-CP-44)	10m
SDL3900RF (SDL-3900-RF)	15m
PX24500 DMX Driver	24m
Data Repeater (SDL-RP316)	24m


CAN BE CUT EVERY 100MM (every 3 LEDs)

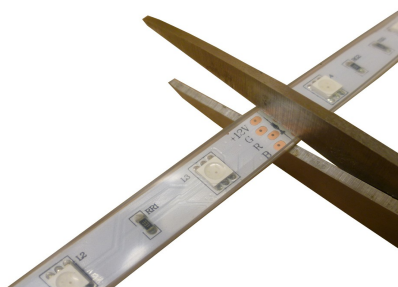

THE RIGHT POWER SUPPLY UNIT?

SDL36	Up to 4m
SDL72	Up to 9m
SDL120	Up to 15m
SDL150	Up to 19m
SDL200	Up to 26m
SDL350	Up to 47m


RGB Controller

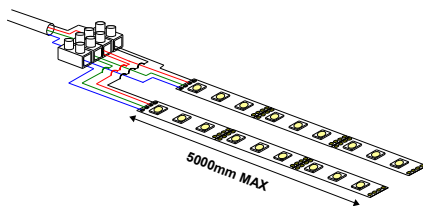

Multiple runs of up to 5000mm can be added.
DO NOT EXCEED CONTROLLER & PSU LIMIT

SDL-RP316 Data Repeater can be used to drive further lengths and keep the LEDs in sync. Please see the SDL-RP316 technical data sheet.

RGB Controller

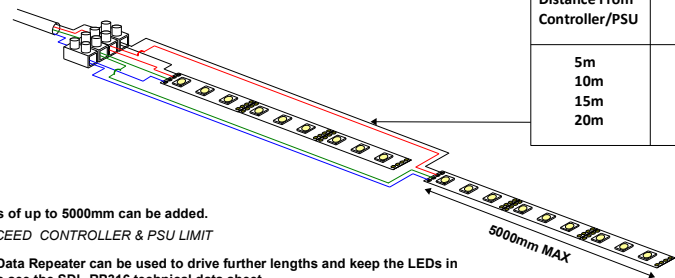

Multiple runs of up to 5000mm can be added.
DO NOT EXCEED CONTROLLER & PSU LIMIT

SDL-RP316 Data Repeater can be used to drive further lengths and keep the LEDs in sync. Please see the SDL-RP316 technical data sheet.