

High Brightness (5050/60/)


Our high brightness is a versatile flexible LED strip. The surface mount Epistar LED's are on a 10mm wide flexible white PCB with 3M adhesive tape on the rear to allow quick and easy installation. This product can be used with our range of dimmers, DMX drivers and power supply units.



SPECIFICATION

Part No.	5050/60/
Voltage	12Vdc
Power Consumption	14.4W / 1200mA per metre
LED Qty	60 per metre
LED Type	Epistar 5050
Size (WxH)	10mm x 2.5mm
Cutting Interval	50mm
Colours Available	Pure White (PW) Warm White (WW) Natural White (NW)

DIMENSIONS

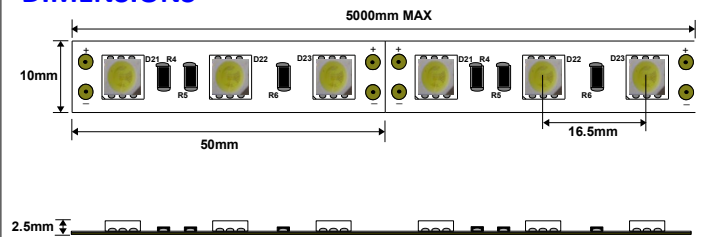

LUMEN OUTPUT

Pure White	1110
Warm White	1080


Data based on 1000mm

CAN BE CUT EVERY 50MM (every 3 LEDs)




THE RIGHT POWER SUPPLY UNIT?

SDL36	Up to 2m
SDL72	Up to 4m
SDL120	Up to 7m
SDL150	Up to 9m
SDL200	Up to 12m
SDL350	Up to 23m

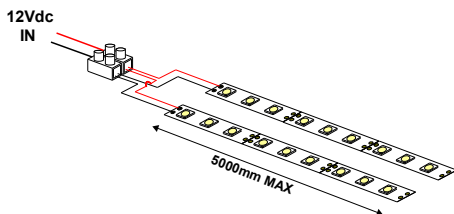

Multiple runs of up to 5000mm can be added.
DO NOT EXCEED PSU LIMIT

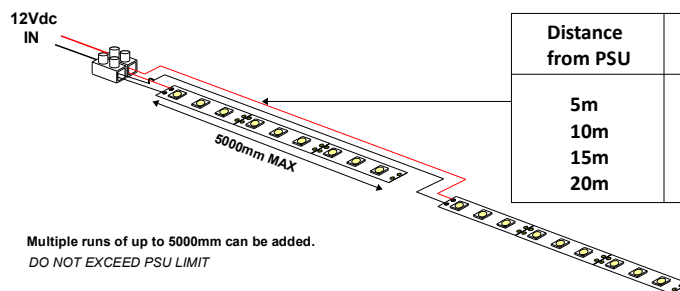

Multiple runs of up to 5000mm can be added.
DO NOT EXCEED PSU LIMIT