sdl lighting experts

Standard Brightness (3528/90/CC)

Our new constant current led strip allows a run of 15m with a SDL150CC or 30m with a SDL350CC connected at one end of the strip. This results in no dimming caused by voltage drop across the full length of the strip.




SPECIFICATION

Part No.
Voltage
Power Consumption
LED Qty
LED Type
Size (WxH)
Cutting Interval
Colours Available

3528/90/CC 36Vdc 7.2W 90 per metre 3528 12mm x 2mm 100mm Warm White (WW) Natural White (NW) Pure White (PW)

DIMENSIONS

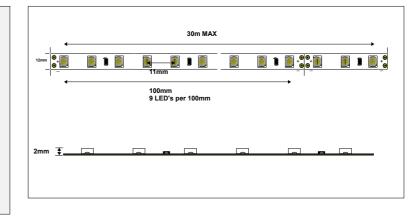

LUMEN OUTPUT

Warm White	500
Natural White	520
Pure White	550

Data based on 1000mm



THE RIGHT POWER SUPPLY UNIT?

SDL150CC SDL350CC


Up to 15m Up to 30m

SDL Lighting, Spimin House, Beacon Road, Poulton Business Park, Poulton-le-Fylde, Lancs, FY6 8JE, (T) 01253 881000, (F) 01253 881019, www.sdllighting.co.uk, contact@sdllighting.co.uk



Standard Brightness (3528/90/CC)

WATERPROOF METHODS

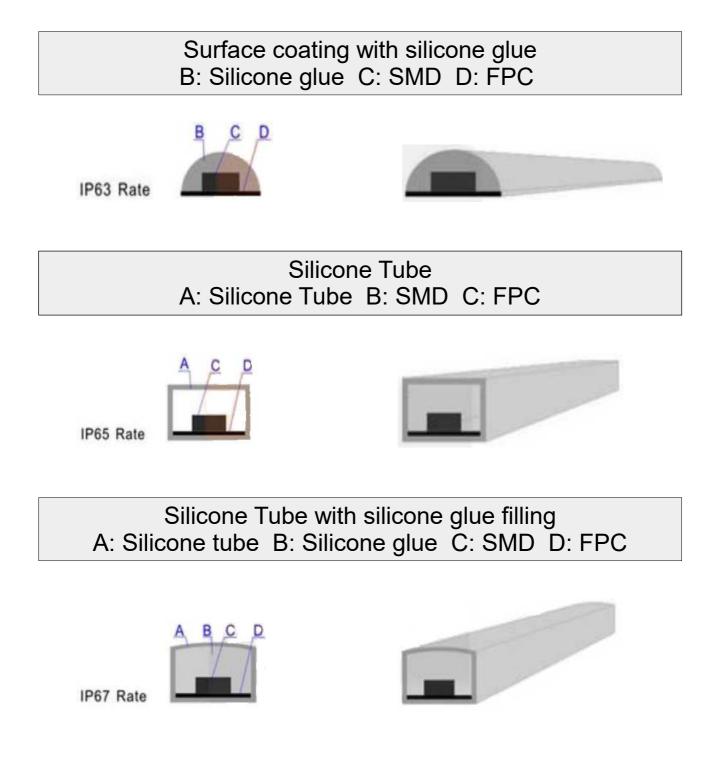

SDL Lighting, Spimin House, Beacon Road, Poulton Business Park, Poulton-le-Fylde, Lancs, FY6 8JE, (T) 01253 881000, (F) 01253 881019, www.sdllighting.co.uk, contact@sdllighting.co.uk