



## Standard Brightness (3528/90/CC)


Our new constant current led strip allows a run of 15m with a SDL150CC or 30m with a SDL350CC connected at one end of the strip. This results in no dimming caused by voltage drop across the full length of the strip.



### SPECIFICATION

<b>Part No.</b>	3528/90/CC
<b>Voltage</b>	36Vdc
<b>Power Consumption</b>	7.2W
<b>LED Qty</b>	90 per metre
<b>LED Type</b>	3528
<b>Size (WxH)</b>	12mm x 2mm
<b>Cutting Interval</b>	100mm
<b>Colours Available</b>	Warm White (WW) Natural White (NW) Pure White (PW)

### DIMENSIONS

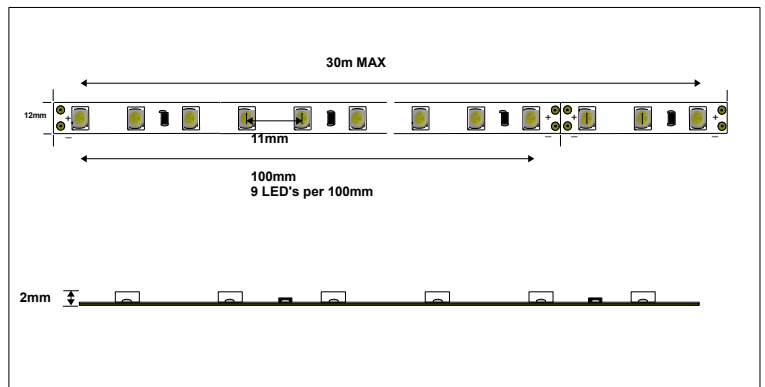

### LUMEN OUTPUT

<b>Warm White</b>	500
<b>Natural White</b>	520
<b>Pure White</b>	550

Data based on 1000mm

### CAN BE CUT EVERY 100MM (every 9 LEDs)



### THE RIGHT POWER SUPPLY UNIT?

<b>SDL150CC</b>	Up to 15m
<b>SDL350CC</b>	Up to 30m

**WATERPROOF METHODS**

Surface coating with silicone glue  
B: Silicone glue C: SMD D: FPC



Silicone Tube  
A: Silicone Tube B: SMD C: FPC



Silicone Tube with silicone glue filling  
A: Silicone tube B: Silicone glue C: SMD D: FPC

